

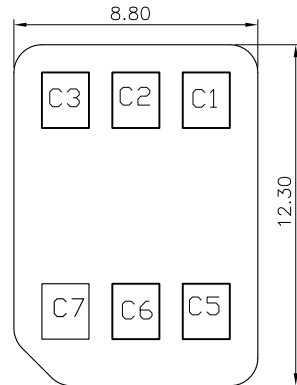
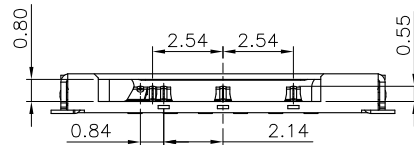
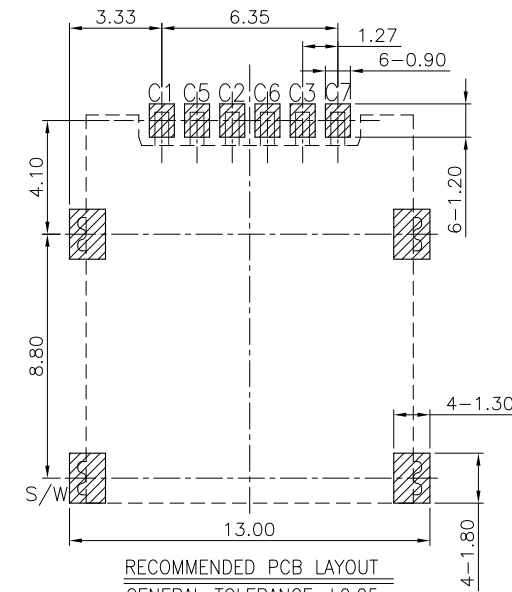
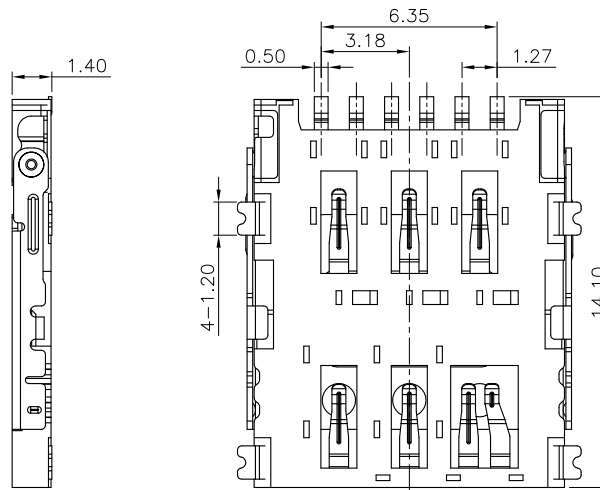
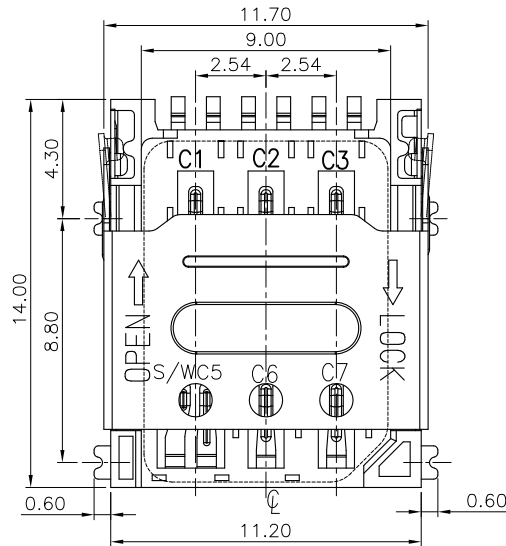




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCT RELEASE	JAMES	2011.03.22

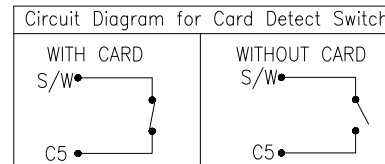

SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS
    - CONTACT RESISTANCE: 80 milliohms MAX.
    - INSULATION RESISTANCE: 1,000 Megohms MIN.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
  - MECHANICAL CHARACTERISTICS
    - RETENTION FORCE: MIN.100gf/PIN
    - DURABILITY: 3,000 CYCLES
  - RoHS 2002/95/EC COMPLIANT.

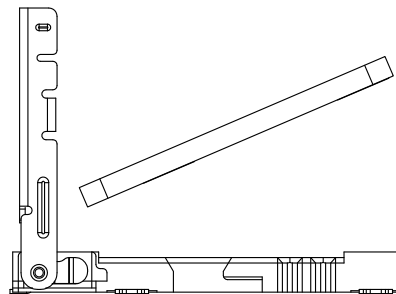

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHELL	1	STAINLESS STEEL 0.15t	Ni PLATING
B	CONTACT	6	COPPER ALLOY 0.15t	Gold plated on contact area Tin plated on Solder tail All over Nickel Plated
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X :±0.5 X :±2°  
X.X :±0.3 X.X :±1°  
X.XX :±0.2



TITLE: NANO SIM CARD 6P 1.4H HINGED TYPE(WITH DET PIN)		
PART NO.	1050626AR002	
DWN	JAMES	2011.03.22
CHKD		
APVD		
SCALE 1:1	UNIT: mm	
CUSTOMER COPY	SIZE: A4	SHEET: 10F1 REV: A